



확 단 상 세 도

TAPER TYPE	KEY TYPE
M10 P1.25 유효길이 10 Taper 1/10 40 12 25 4 5.0^{+0.03}_{-0.03} 5.0^{+0.03}_{-0.03} 4.3^{+0.1}_{-0.1} 16.0^{+0.015}_{-0.015} 5 3 SEC. X-X'	40 25 5 5 3 KEY TYPE




MS3102A20-15P
Motor Cable
Connector 접속도

Lead Wire 상표시	PIN 번호
U	A
W	B
V	C
Ground	D
Brake +	E
Brake -	F



MS3102A20-29P
Encoder Cable
Connector 접속도

ENCODER 신 호	CONNECTO PIN 번호
0 V	G
V _{CC}	H
V _{BATTERY}	K
0 V _{BATTERY}	L
FG	N
SD	P
$\overline{\text{SD}}$	R
SHIELD	J

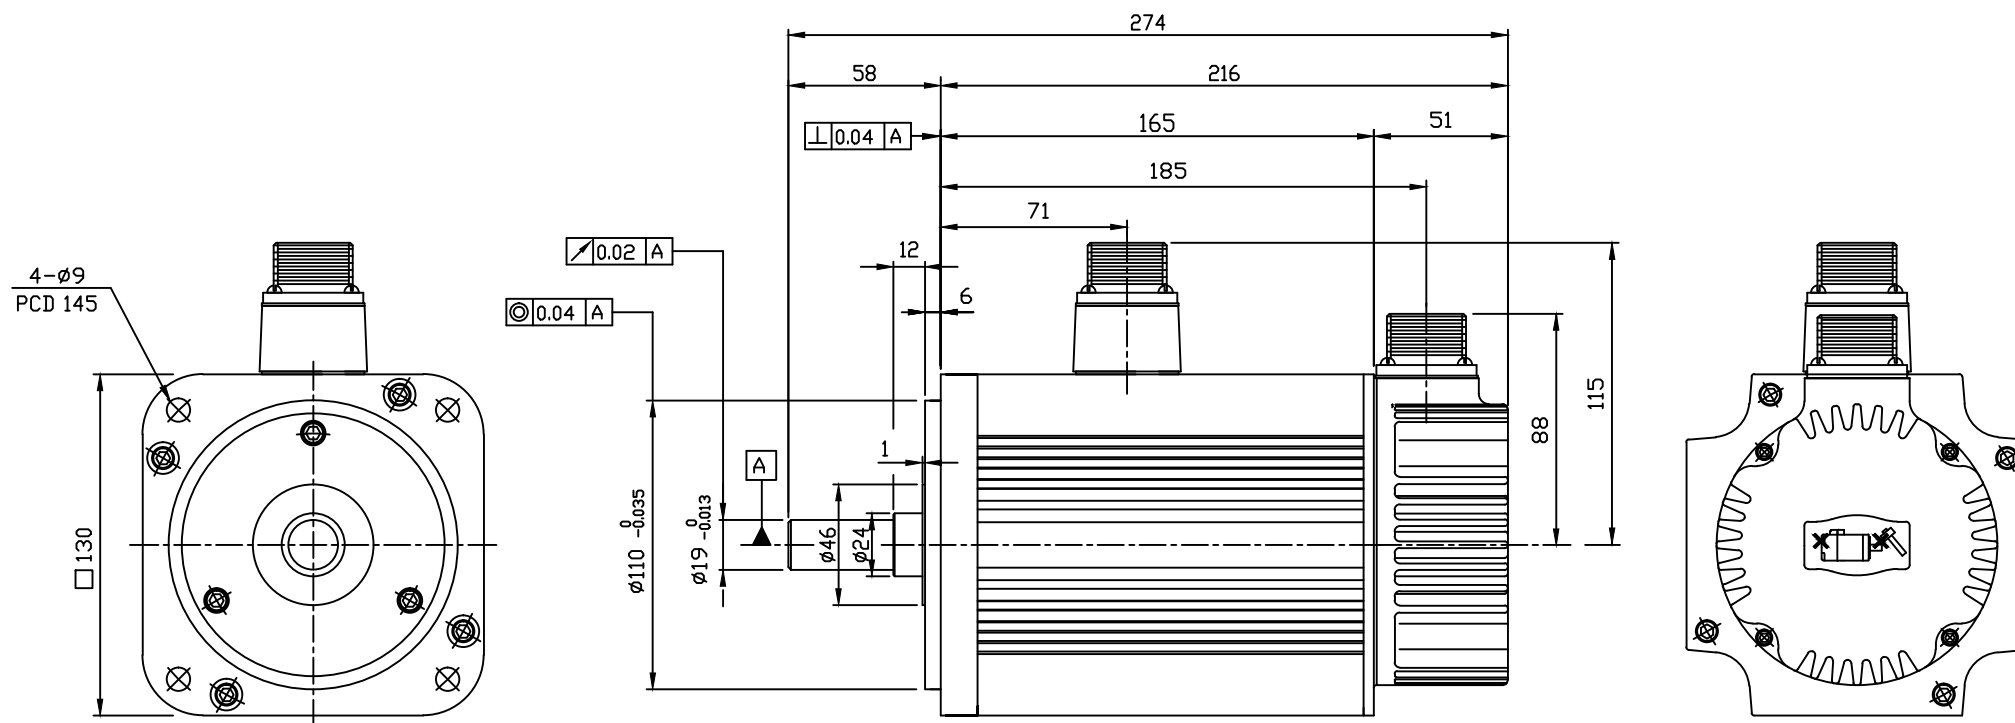

1. 브레이크 입력전원은 표준:DC90[V],특주:24[V]를
확인후 사용할 것.
2. 중량 : 9.2Kg

삼 각 법	단 위	mm	척 도	$\frac{N}{S}$	명 칭	FMALN06-PB10	
제 도	설 계	검 도	승 인			N130(BRAKE TYPE)	
			관계도번		도 번		/